


SCS PTC-II, PTC-IIe Wiring to Kenwood 440s

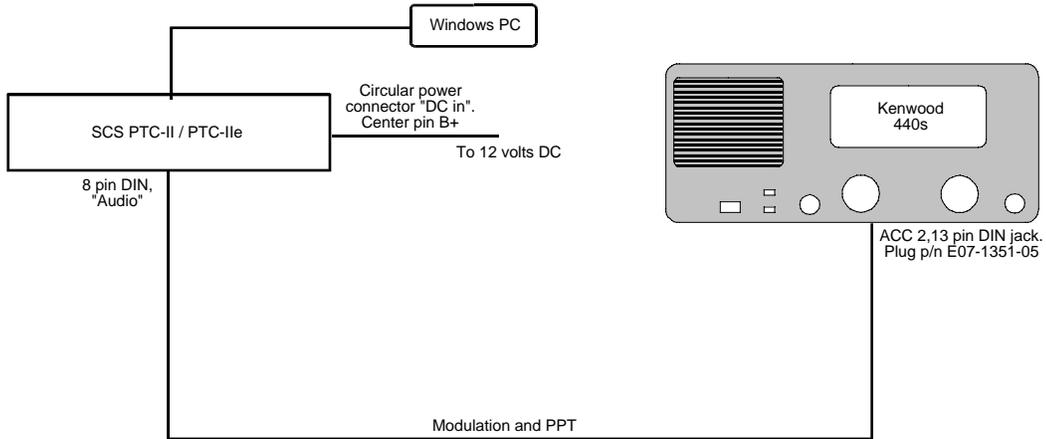


MODULATION AND PTT

PTC-II 8 PIN DIN "AUDIO"	PTC-II COLOR	KENWOOD "ACC 2" PIN NAME	KENWOOD 13 PIN DIN "ACC 2"	FUNCTION
1	VIOLET	DATA INPUT	11	AUDIO, SCS TO RADIO
2	WHITE	GND	8	GROUND
3	YELLOW	PUSH TO TALK	13	PUSH TO TALK
4	GREEN	DATA OUTPUT	3	AUDIO, RADIO TO SCS
SHELL	SHIELD	GND	12	AUDIO IN SHIELD

NOTE 1. INSULATE UNUSED WIRES.

NOTE 2. **THE RADIO'S MICROPHONE MUST BE REMOVED WHILE TRANSMITTING WITH THE MODEM TO PREVENT MIC AUDIO FROM DEGRADING TRANSMIT PERFORMANCE.**



VIEW INTO BACK OF RADIO
(INTO BACK OF PLUG)

Farallon Electronics
 2346 B Marinship Way, Sausalito, CA 94965 USA
 415•331•1924 / voice 415•331•2063 / fax
 theoffice@yachtwire.com Copyright Farallon Electronics 1997-2000

Drawn by: _____ rev: _____