


SCS PTC-II, PTC-IIe Wiring to Icom M710 / M700pro

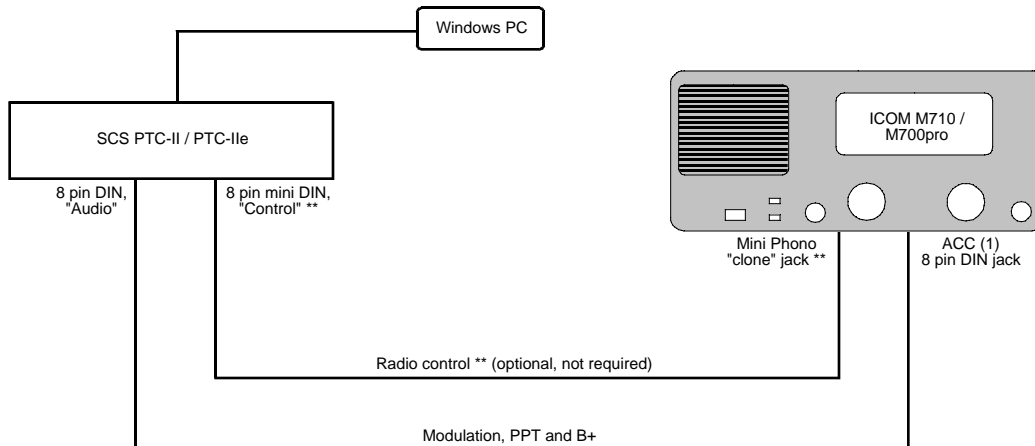

MODULATION, PTT AND B+

PTC-II 8 PIN DIN "AUDIO"	PTC-II COLOR	ICOM ACC (1) PIN NAME	ICOM 8 PIN DIN "ACC (1)"	FUNCTION
1	VIOLET	MOD	4	AUDIO, SCS TO RADIO
2	WHITE	GND	2	GROUND
3	YELLOW	SEND	3	PUSH TO TALK
4	GREEN	AF	5	AUDIO, RADIO TO SCS
5	BLUE	13.6 V	7	B+ POWER TO MODEM


NOTE 1. INSULATE UNUSED WIRES.

RADIO CONTROL ** (optional)

PTC-II 8 PIN MINI DIN "CONTROL"	PTC-II COLOR	ICOM PIN NAME	ICOM MINI PHONO "CLONE JACK"	FUNCTION
3	YELLOW	N/A	OUTER JACKET	GROUND
6	BLACK	N/A	CENTER TIP	ICOM

NOTE 2. NO SHIELD CONNECTION AT RADIO SIDE. INSULATE UNUSED WIRES.

**** NOTE: RADIO CONTROL IS A FEATURE OF THE PTC-II ONLY. DISREGARD RADIO CONTROL ITEMS WHEN USING THE PTC-IIe.**



VIEW INTO RADIO JACK
(VIEW INTO BACK OF PLUG)

Farallon Electronics
 2346 B Marinship Way, Sausalito, CA 94965 USA
 415•331•1924 / voice 415•331•2063 / fax
 theoffice@yachtwire.com Copyright Farallon Electronics 1997-2000

Drawn by: rev: